

### Advertising & Wide Format Roll to Roll

#### Roll to Roll


★ Dye Fixation of Direct Printed Dispersed Dyes or Pigments



#### Features

- 50% Full Oil Drum
- Analog Control Panel
- Roll to Roll Only
- One Unwind & One Rewind
- 2 Air Expansion Shafts
- High Quality Relay
- Oil Drum with Teflon Coating
- Carbon Brush Slip Ring
- 85% Convergence
- Auto Rewind
- Pneumatic Tension
- Insulation Cover
- Fume Exhaust System
- Manual Tensioner

#### Process Diagram

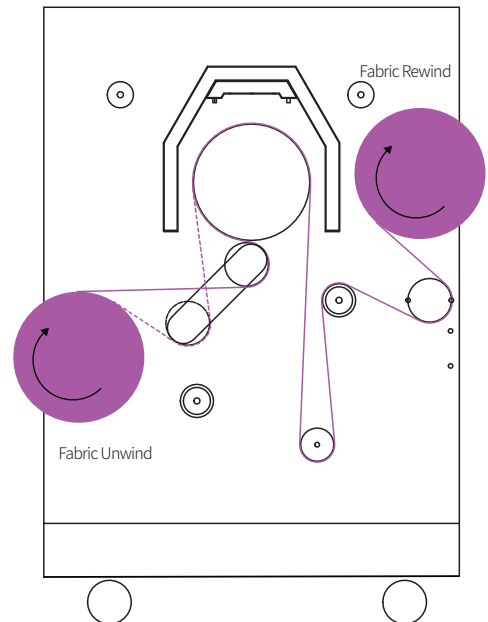

#### Specifications

Model	50% Full Drum Size (mm / inch)	Workable Width (mm / inch)	Rated Power (3 Phase 220V)	Max Amps (3 Phase 220V)	Rated Power (3 Phase 380V)	Max Amps (3 Phase 380V)	Qty of Heater	Linear Speed 10 Sec. Dwell (m & inch / min)	Roll to Roll
TFM-1700	260 / 10.2"	1700 / 67"	13KW	34A	16KW	24A	9	4.1 / 161"	
TFM-3200	260 / 10.2"	3200 / 126"	23KW	60A	28KW	43A	9	4.1 / 161"	