


### PE - Billboard

- ★ Outdoor Advertising
- ★ Billboards / Banners
- ★ POP/Displays
- ★ Trade Shows



### Features

- ★ Specialty for UV ink system
- ★ 5m seamless
- ★ Environmental friendly, PVC free and 100% biodegradable
- ★ Good outdoor durability in different weather conditions
- ★ Easy for installation
- ★ High loading efficiency in terms of shipping

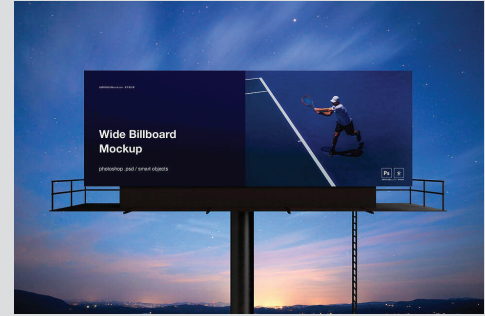

### Specifications

Material Properties	Weight	Tensile Strength, Grab	Tensile Elongation, Grab	Tear Strength, Tongue	High Temp Shrinkage (100°C/212°F, 1h)	Low Temp Bend	Whiteness	Surface	Corona Treatment
ASTM Test Methods	D751	D5034	D5034	D2261	D1204	D2136	E313	—	—
Metric	140g/m <sup>2</sup>	157 x 131 N/cm	10%	178 x 156 N	≤ 2%	-35°C	85	Glossy/Matt	38+ dyne
English	4.2 oz/yd <sup>2</sup>	90 x 75 lbs	10%	40 x 35 lbs	≤ 2%	-30°F	85	Glossy/Matt	38+ dyne

### PE - Poster

- ★ Outdoor Advertising
- ★ Posters
- ★ Billboards / Banners



### Features

- ★ UV ink system
- ★ Environmental friendly and 100% biodegradable
- ★ Good outdoor durability in different weather conditions
- ★ Easy for installation
- ★ Lightweight and good hand feeling
- ★ High loading efficiency in terms of shipping
- ★ High loading efficiency in terms of shipping
- ★ Width Available Up to 196 in / 5m

### Specifications

Material Properties	Weight	Tensile Strength, Grab	Tensile Elongation, Grab	Tear Strength, Tongue	High Temp Shrinkage (100°C/212°F, 1h)	Low Temp Bend	Whiteness	Surface	Corona Treatment	
ASTM Test Methods	D751	D5034	D5034	D2261	D1204	D2136	E313	—	—	
76	Metric	76g/m <sup>2</sup>	113 x 70 N/cm	10%	40 x 31 N	≤ 2%	-35°C	85	Glossy/Matt	38+ dyne
	English	2.2 oz/yd <sup>2</sup>	65 x 40 lbs	10%	9 x 7 lbs	≤ 2%	-30°F	85	Glossy/Matt	38+ dyne
80	Metric	80g/m <sup>2</sup>	87 x 87 N/cm	10%	89 x 89 N	≤ 2%	-35°C	85	Glossy/Matt	38+ dyne
	English	2.3 oz/yd <sup>2</sup>	50 x 50 lbs	10%	20 x 20 lbs	≤ 2%	-30°F	85	Glossy/Matt	38+ dyne