

### High Speed Production — HS

#### High Speed Roll to Roll

- ★ Transfer Printing
- ★ Direct Inks Reactivation
- ★ Lamination



### Features


- (R) Branded Electronic Components
- (P) Pneumatic Tension/Pressure Control
- (T) User Friendly Touch Screen
- (B) Belt Pressure Control
- (100%) 100% Full Oil Drum
- (C) Carbon Brush Slip Ring
- (A) Auto Alignment - Fabric Feeding
- (T) Precise Temperature Control
- (C) Blanket Auto Centering
- (Q) Quick Launch Button
- (80%) 80% Blanket Coverage
- (S) Suitable for 30gsm Paper
- (T) Overheat Protection/Alarm
- (D) Diversified Optional Features
- (W) Adjustable Heat Power



Control Panel



Power Regulator




Slip Ring



Pneumatic Adjustment






Belt Auto Centering



Auto On/Off

### High Speed Production — HS

### Process Diagram

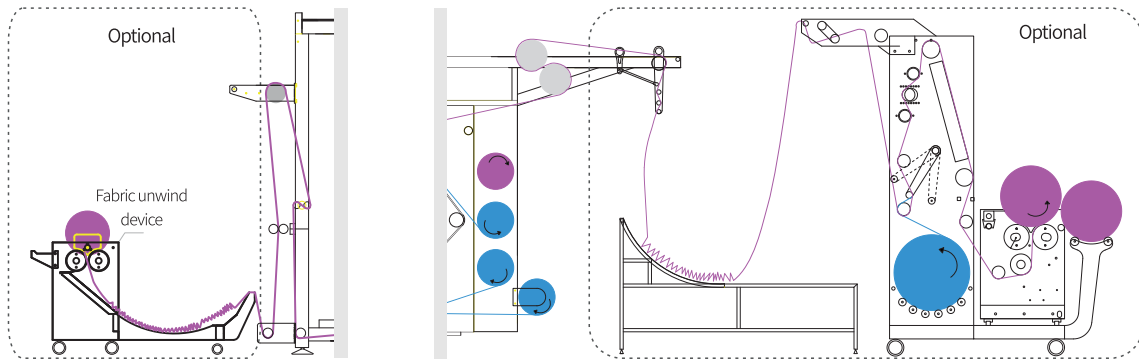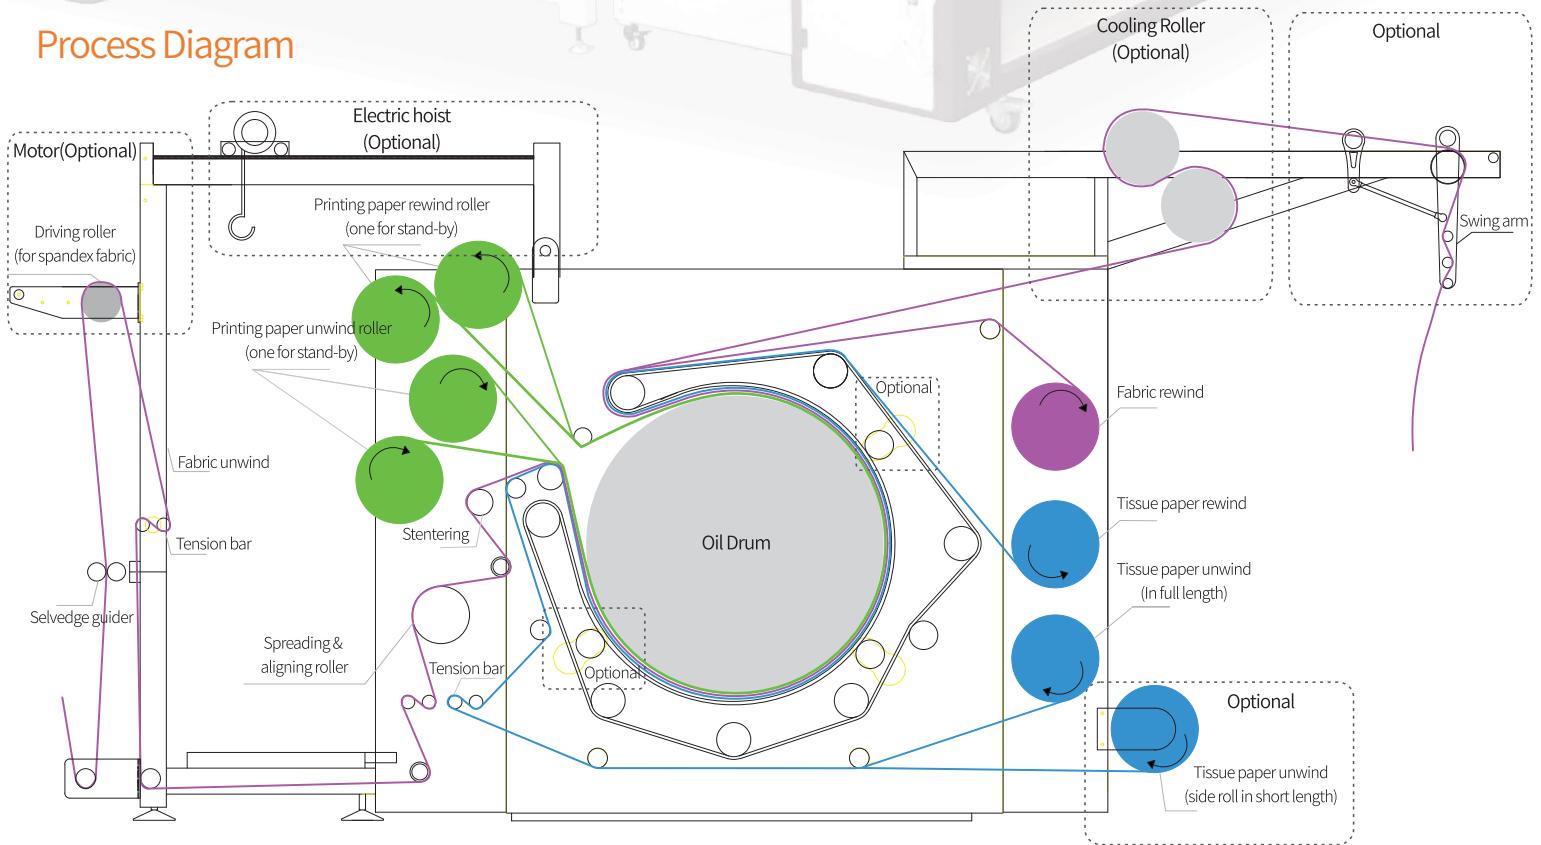

### Specifications

Model	100% Full Drum Size (mm / inch)	Workable Width (mm / inch)	Rated Power (3 Phase 380V)	Max Amps	Qty of Heater	Warm Up (Min / 210°C)	Linear Speed 20 Sec. Dwell (m & inch / min)	Roll to Roll	Auto Power ON & OFF	Felt Auto Centering
HS - 18 - 100H	1000 / 39.4"	1800 / 70.9"	90KW	137A	45	90	7.6 / 299"	☑	☑	☑
HS - 26 - 100H	1000 / 39.4"	2600 / 102.4"	115KW	175A	45	90	7.6 / 299"	☑	☑	☑
HS - 32 - 100H	1000 / 39.4"	3200 / 126.4"	131KW	199A	45	90	7.6 / 299"	☑	☑	☑
HS - 18 - 120H	1200 / 47.2"	1800 / 70.9"	114KW	173A	57	90	9 / 354"	☑	☑	☑
HS - 26 - 120H	1200 / 47.2"	2600 / 102.4"	145KW	220A	57	90	9 / 354"	☑	☑	☑
HS - 32 - 120H	1200 / 47.2"	3200 / 126.4"	166KW	252A	57	90	9 / 354"	☑	☑	☑
HS - 18 - 150H	1500 / 59.1"	1800 / 70.9"	144KW	219A	72	90	11.4 / 449"	☑	☑	☑
HS - 26 - 150H	1500 / 59.1"	2600 / 102.4"	180KW	273A	72	90	11.4 / 449"	☑	☑	☑
HS - 32 - 150H	1500 / 59.1"	3200 / 126.4"	210KW	319A	72	90	11.4 / 449"	☑	☑	☑

★ Warranty policy does not apply to Blanket and Oil Drum  
 ★ Other Parts are eligible for 15 months warranty under proper use. (Starting from the time of ETD)  
 ★ Specifications and external appearance are subject to change without prior notice